圣诺飞机械
SANOFI MACHINE

张家港圣诺飞机械有限公司
地 址：张家港市乐余镇乐江路88号
手 机：18018113593　　电 话：0512-58666137
传 真：0512-58666137　　E-mail：charlie@cnsanofi.com
http://www.cnsanofi.com

Zhangjiagang SANOFI Machinery Co., Ltd
Address: No.88 Lejiang Road, Leyu Town, Zhangjiagang City, Jiangsu Province
Mobile：+86 18018113593　　Tel：+86 512-58666137
Email: charlie@cnsanofi.com　　befilling@gmail.com
Skype：Charlie.sanofi
http://www.cnsanofi.com

圣诺飞机械
SANOFI MACHINE

SANOFI MACHINERY

Professional Manufacturer
For Beverage Packing Machines

饮料包装机械专业制造商



圣诺飞机械

SANOFI MACHINERY

饮料包装机械专业制造商

Professional Manufacturer For Beverage Packing Machines



张家港圣诺飞机械有限公司

Zhangjiagang SANOFI Machinery Co., Ltd

公司简介

张家港圣诺飞机械有限公司是一家从事食品饮料机械及水处理设备的专业制造商。企业坚持以市场为导向，科技为先行，质量是生命、服务至上的经营里登理念。建立了完善的质量保证体系，企业以诚信为本。 主营产品：水处理线，矿泉水、纯净水灌装生产线，果汁灌装生产线，含气饮料灌装生产线，易拉罐饮料灌装生产线，5加仑桶水灌装线，及注塑机，吹瓶机，套标机，膜包机等配套设备。

设备使用范围：各种饮料：水，果汁，含气饮料。

各种瓶子：PET，玻璃瓶，5加仑桶，易拉罐。

各种灌装方式：常压，等压，负压。

生产能力：每月可生产10条整线。

质量控制：有专业的质检部门，确保出厂前机器符合生产标准。公司机器通过多家著名认证公司认证。

设计研发：相关部门市场调查后，根据最近的市场行情，结合发展形势，设计研发出更优更 好的产品。

出口市场：产品热销亚洲，非洲，欧洲，南美洲，北美洲等全球80多个国家，并获得客户一致好评。

合作品牌：零件全部使用著名品牌，品质有保证，能得到专业的技术支持和售后服务。

销售包装：出厂机器采用专业安全的木箱包装，以免运输途中机器被损坏。

运输方式：专业的船公司运输机器，快速安全的速递公司寄送单据。

样品服务：欢迎来我工厂参观设备运行，或在得到客户允许的情况下到邻近的客户处参观。

定制化服务：可根据您的产量，瓶子材料和大小，饮料种类，电压等量身定制。

售后服务：专业工程师上门安装并调试机器，培训相关操作人员，直到可以熟练运作机器。

提供一年包修，相关零件全免费。

SANOFI leads the market in the field of machinery and process technology for liquid packaging.

- ◇ The wide range of liquid packaging plant machinery
- ◇ Machinery for the most comprehensive scope of processes in connection with liquid packaging
- ◇ Worldwide presence
- ◇ 10+ years of global market experience
- ◇ Large number of customers worldwide
- ◇ The various range of possible end products

The SANOFI products range cover all types of machinery for packaging of liquid including water, tea, juice, pulp, carbonated soft drinks, energy drinks, alcoholic drinks, beer, kvass, edible oil, dairy products, syrup, etc.

Leadership in quality and technology from raw material to bottled liquid to recycled plastic chips - SANOFI, **A-Z turnkey plant supplier,** is known for developing innovative high-end products and new technologies.



Water Treatment System

张家港圣诺飞机械有限公司
Zhangjiagang SANOFI Machinery Co., Ltd

水处理系统
Water Treatment System

该水处理系统主要用于制取纯净水，矿泉水，各种饮料前处理用水。它可以有效地除掉原水中的各种颗粒，悬浮物，异味和颜色，同时过滤掉其它物质，过滤重金属离子，软化水，以使其达到饮用水标准。

This water treatment system is mainly used to get pure water, mineral water, pre-treatment water for all kinds of beverage. It can effectively get rid of suspended substance smell and color in raw source water. And it filter organics, microorganism, chloride, colloidal particles, and residual chlorine. Besides, this system filters heavy metal ion to reduce hardness of the water, to make it reach to standard of drinking water.

产品范围：
反渗透（RO）设备系列
过滤器设备系列
膜产品及滤芯
臭氧杀菌系统
Product Range:
Reverse osmosis (RO) equipment series
Filter equipment series
Membrane and filter elements
Electro dialysis, ion exchanger,
ozone sterilization system


应用范围：
饮用纯净水、矿泉水、矿物质水、山泉水
食品饮料用水
Scope of application:
Drinking pure water, mineral water
Food and drink water
Boiler feed water, industrial wastewater treatment
Pharmaceutical water, high purity water in electronic industry






张家港圣诺飞机械有限公司
Zhangjiagang SANOFI Machinery Co., Ltd

饮用水工艺生产线流程图
Flow Chart Of Drinking Water Production Line

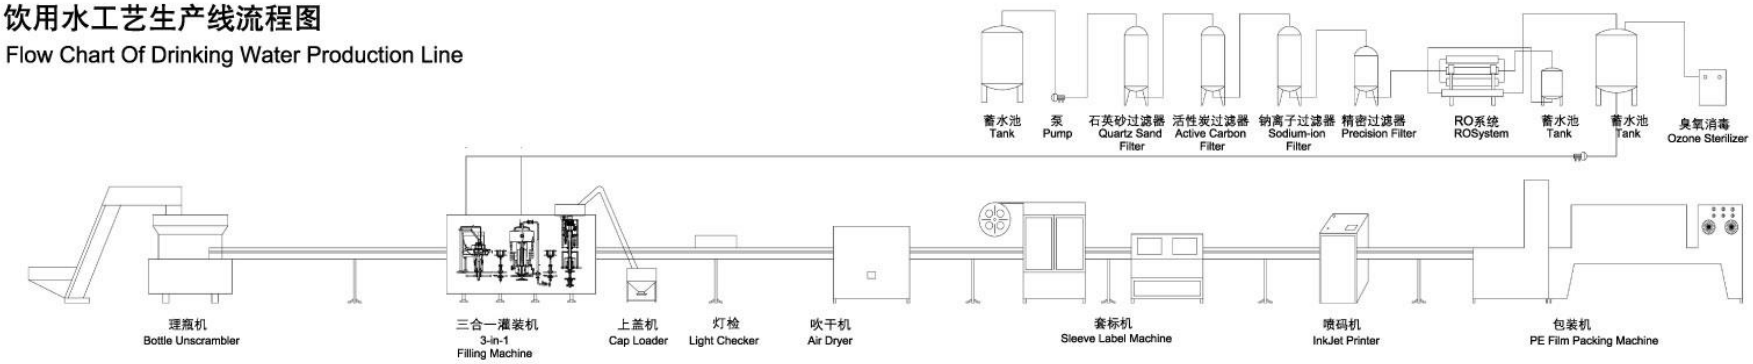

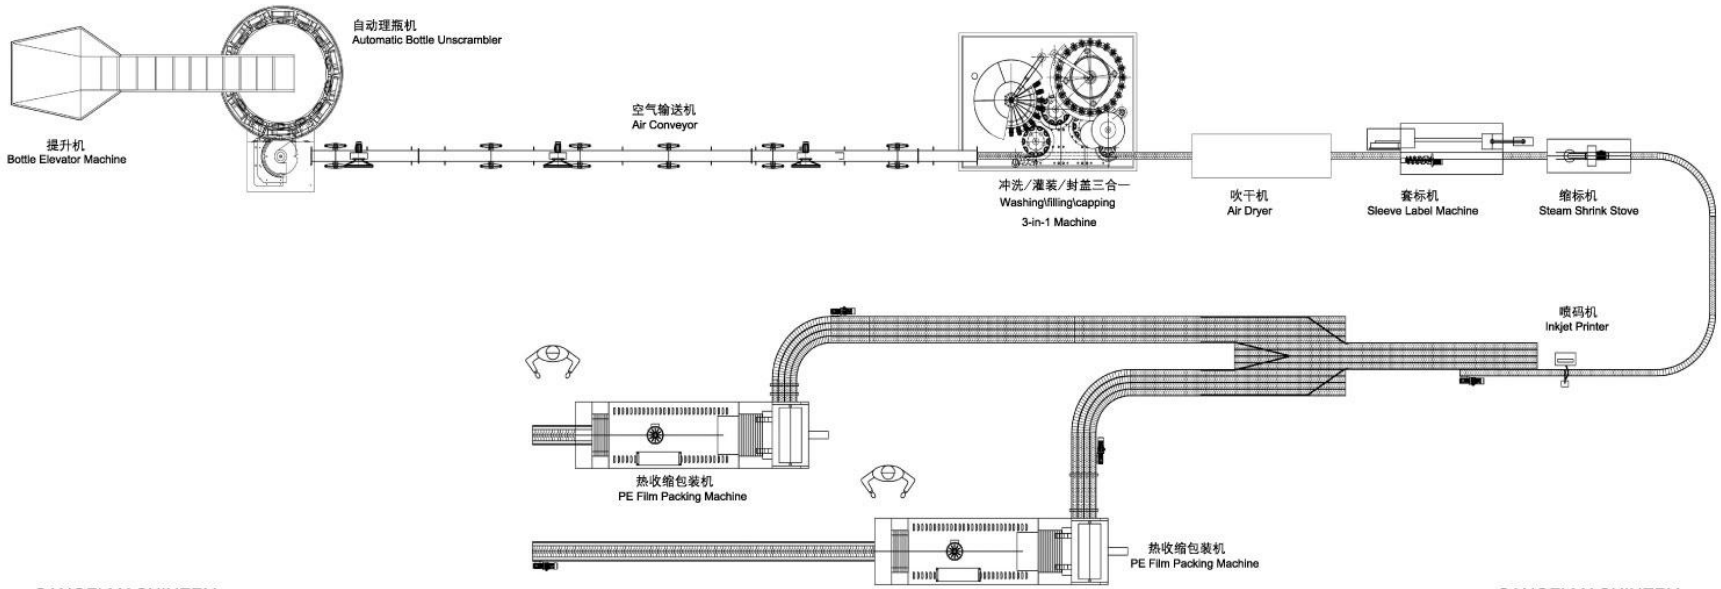



张家港圣诺飞机械有限公司
Zhangjiagang SANOFI Machinery Co., Ltd

饮用水灌装生产线
Drinking Water Filling Line



该机集冲洗，灌装，旋盖为一体的全自动多功能联合机组，它适用于各种无气饮料，油醋，果酒，矿泉水，纯净水的自动冲洗，灌装，封口。该线设计独特，样式新颖，功能齐全，适应性强，操作使用方便，外形造型美观，自动化程度高，是目前最先进灌装设备。

The machine is a full-automatic multiple-funcition washing,filling and capping unit. It is used in washing, filling and sealing all kinds of no gas contained liquid such as fruit juice.oil&vinegar wine,fruit wine,mineral water and pure water.The line has features of unique design,new style,complete functions,multi-purpose,convenient in operation,beautiful construction high automaticity.

技术参数 Technical Parameter

型号 Model	CGF16126	CGF18186	CGF24248	CGF323210	CGF404012	CGF505012	CGF606015	CGF808020
冲洗，灌装，旋盖头数 Heads of washing,filling,sealing	16-12-6	18-18-6	24-24-8	32-32-10	40-40-12	50-50-12	60-60-15	80-80-20
生产能力 Production capacity:500ml(B/H)	4000	6000	10000	12000	16000	22000	26000	36000
适用瓶型规格 Suitable bottle size	Φ=50-Φ95mm 330-1500ml		Φ=50-105mm 330-2250ml		Φ=50-110mm 330-2500ml			
喷冲压力 Spraying pressure(Mpa)	0.25-0.3							
功率 Power supply(Kw)	5.8	6.6	7	10.4	11.5	14	19	24
外形尺寸 Overall dimension(L×W×H)mm	2300×1700 ×2500	2500×1850 ×2500	3100×2100 ×2500	4600×2160 ×2500	4600×3800 ×2500	5000×4700 ×2500	6500×5400 ×2500	7700×6400 ×2500
重量 Weight(kg)	2600	3500	5000	6800	8500	10000	12500	16000

纯净水、矿泉水、果汁、酒类等冲洗、灌装封口自动生产流水线

Washing,Filling And Sealing Production Line For Pure Weter,Mineral Water, Fruit Juice&spirit,etc.



本生产线有QS型自动冲瓶机、CYG型常压灌装机、FXZ型自动旋盖机及SSJ型输送机等系列产品组成。本机冲洗、灌装、封口等主要关键部位均采用优质不锈钢材料制成，具有工艺先进、系统完善、性能可靠、使用方便等特点。

The production line includes QS automatic washer, CYG normal pressure filler, FXZ cap capping machine, SSJ carrying machine ect. The key parts for washing, filling and sealing are made of high quality stainless material, with the features of advanced technology, completed system, reliable performance, easy in operation.


型号Model	生产能力Capacity	适瓶高度Bottle Height	电机功率Motor Power
QS-12 CYG-12 FXZ-1	2000-3000 B/H	160-300 mm	2.25kw
QS-18 CYG-18 FXZ-6	3000-5000 B/H	160-320 mm	2.95 kw
QS-24 CYG-24 FXZ-6	3000-8000 B/H	160-340 mm	3.7 kw



张家港圣诺飞机械有限公司
Zhangjiagang SANOFI Machinery Co., Ltd

碳酸饮料生产线工艺流程图

Flow Chart of Carbonated Drink Production Line

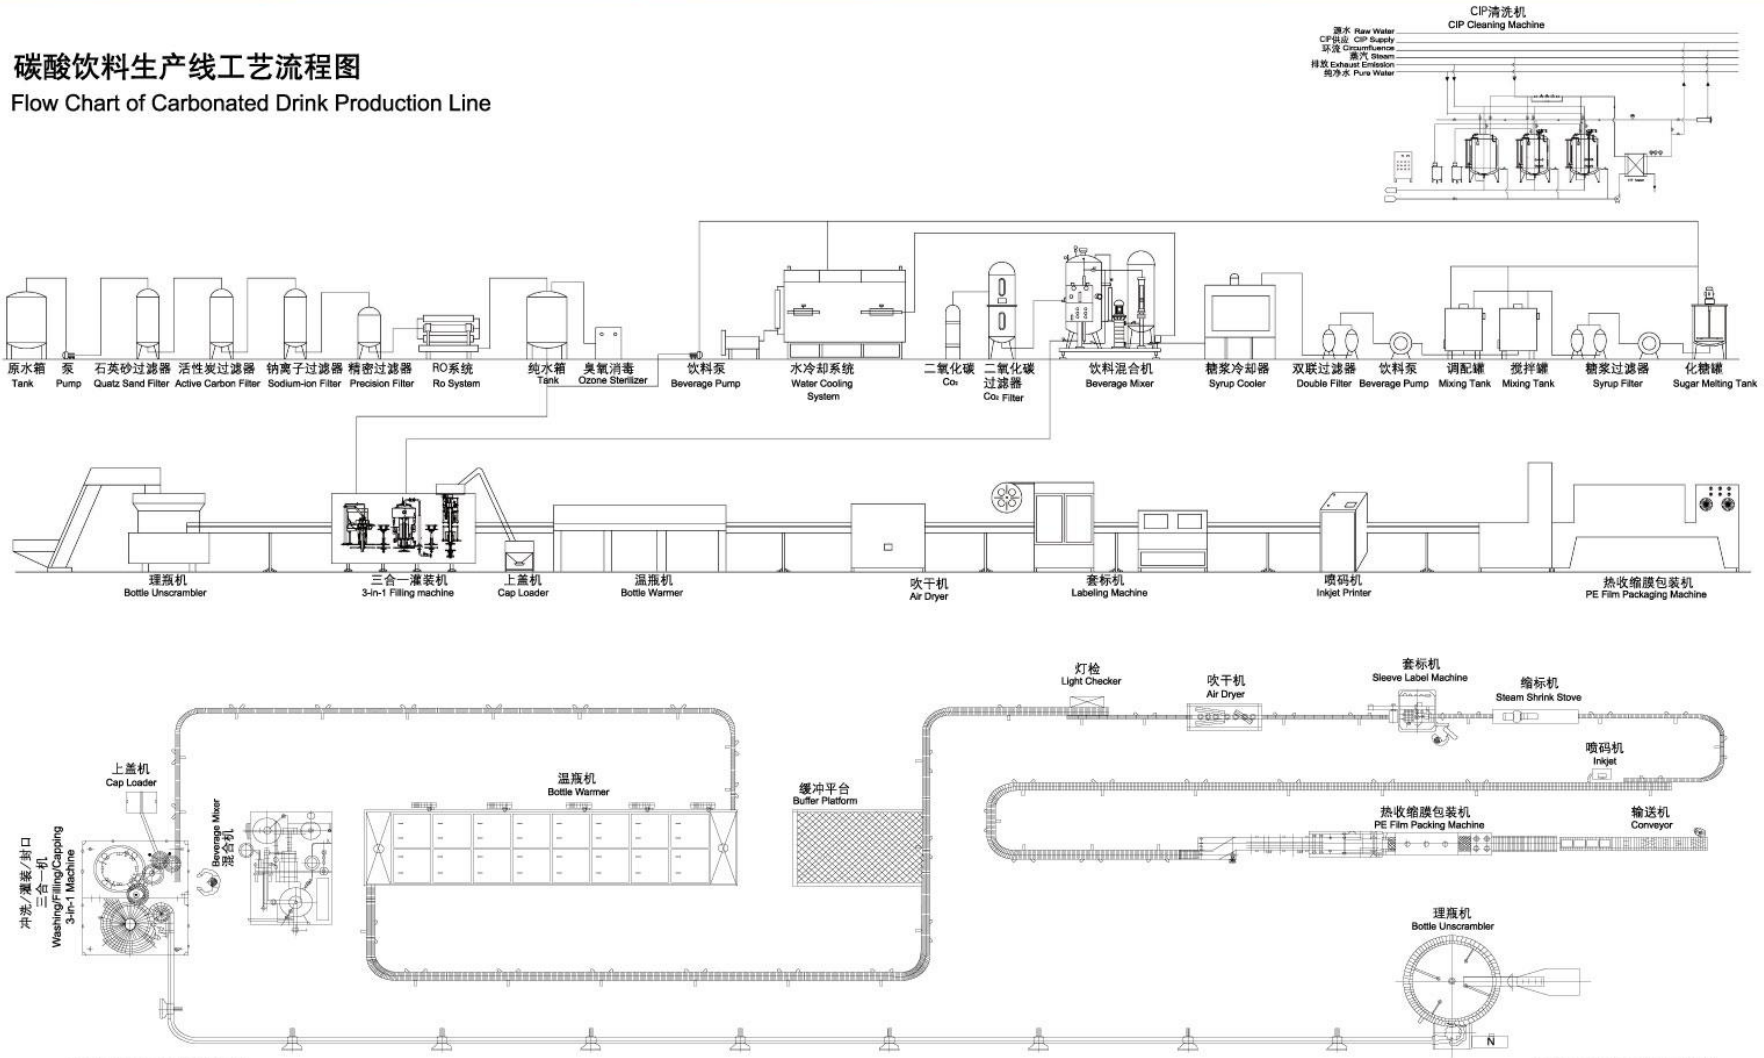



张家港圣诺飞机械有限公司
Zhangjiagang SANOFI Machinery Co., Ltd

碳酸含气饮料3合1等压灌装机

Carbonated Drinks Isobaric Washing/Capping/ Filling 3in1 Machine

本机主要用于PET瓶的灌装作业，适合灌装含气饮料（碳酸饮料），如：可口可乐、百事可乐、雪碧、汽水等。

PET瓶旋盖式封口，可以选配铝盖和塑料盖。

本机集成冲洗、灌装、旋盖三功能于一体。

本机采用了先进的三菱PLC控制机器的自动运行，可靠的人机界面。

进瓶链道采用变频器调整，与主机变频器相互配合使进瓶运行更稳定可靠。

可靠的光电检测，高效的自动化生产，操作简便。





Product Description:

This type machine is mainly used in filling&packing soft drinks(carbonated drinks),such as Coca cola, Pepsi,sprite,aerated water etc,it is suitable for PET bottle.

The PET bottle is with screw capping , it can be equipped with aluminum cap and plastic cap

The machine contains Washing, Filling and Capping three functions together in one.

It runs automatic by advanced MITSUBISHI PLC controller with reliable HMI touch screen.

The conveyor runs by frequency changer, it synchronous with the host inverter makes bottle feeding more stable and reliable.

Reliable photoelectric detection, high-efficiency fully automatic production,simple operation.





技术参数 Technical Parameter


Item/model	DCGF16-12-6	DCGF18-18-6	DCGF24-24-8	DCGF32-32-10	DCGF40-40-10	DCGF50-50-12	DCGF60-60-15	DCGF72-72-16	DCGF80-80-18
Capacity(500ml)(bph)	3000-4000	5000-6000	7000-8000	9000-10000	13000-15000	16000-18000	20000-22000	28000-30000	32000-34000
Filling heads	16	18	24	32	40	50	60	72	80
Flushing heads	12	18	24	32	40	50	60	72	80
Capping heads	6	6	8	10	10	12	15	16	18
Filling precision	≤+5mm(Liquid level)								
Bottle dimension	Bottle diameterø50-ø100,height150-320								
Flushing pressure	0.25MPa								
Power(KW)	4.4	5.2	6.2	6.2	7.5	12.8	12.8	14.28	15.28
Voltage	380VAC 50/60Hz or Customized								
Outline dimension	2250×1600 ×2100	2430×1800 ×2100	3050×2060 ×2100	4050×2300 ×2100	4430×3280 ×2700	4720×3550 ×2750	4800×3600 ×2750	4860×3650 ×2750	6500×5500 ×2750
Total Weight(kg)	2500	3500	4500	6800	7500	8800	9000	9500	11000




张家港圣诺飞机械有限公司
Zhangjiagang SANOFI Machinery Co., Ltd

果汁、茶、热灌装饮料生产线工艺流程图

Flow Chart Of Juice & Tea Hot Filling Line

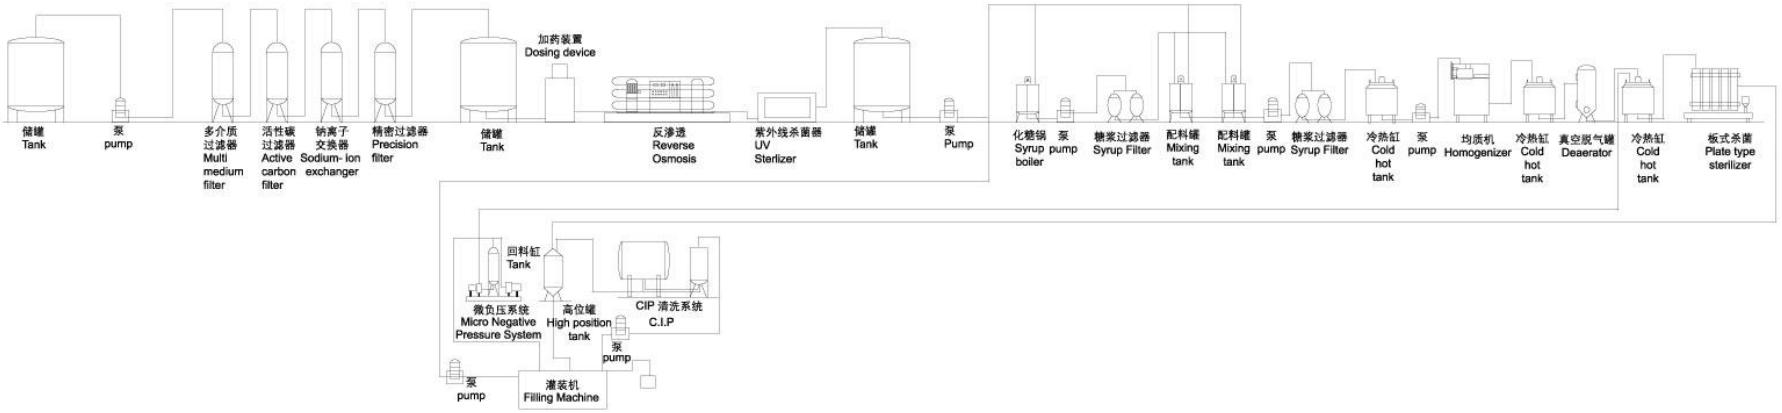

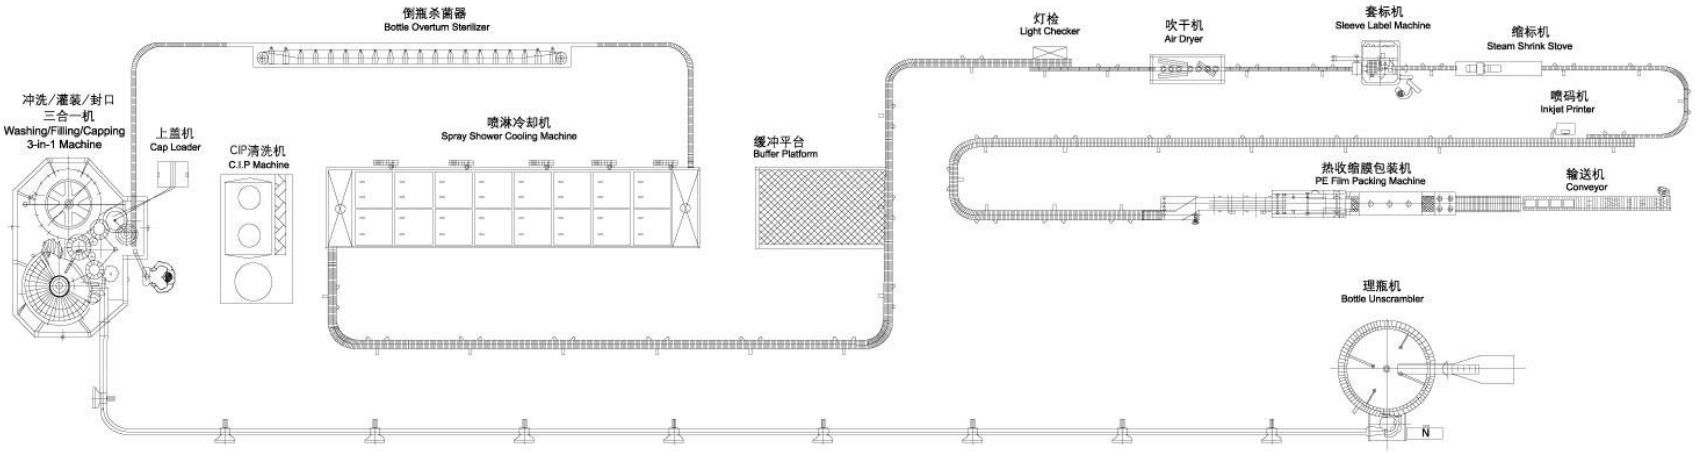




张家港圣诺飞机械有限公司
Zhangjiagang SANOFI Machinery Co., Ltd

热灌装生产线 Hot Filling Line



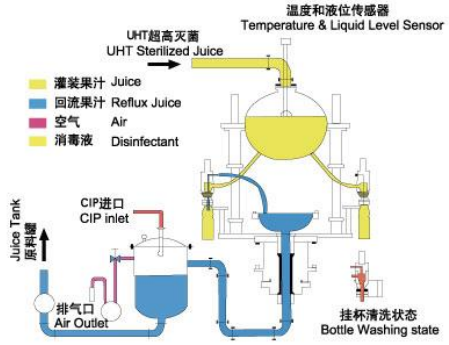



CGFR系列全自动冲洗、灌装、旋盖三合一机引进意大利技术，精工制造，可实现无菌灌装，增加恒温系统，更换部分附件，可适应耐热PET瓶，果汁，茶，饮料等热灌装工艺要求。该机组技术先进，占地面积小，结构紧凑，适应于PET瓶装各种不含气饮料(矿泉水，纯净水，蒸馏水，果汁，茶，饮料等)常温或热灌装，也适用醋等液体的清洗，灌装，封口。是目前最先进的饮料灌装设备。

CGFR series fully automatic Washing，filling and screw capping combined machine，whose main technique was imported form Italy. Because it is equipped with constant temperature controlling system. It is suitable to fill hot fruit juice，tea and other beverage into heat resistant PET bottle. The complete set of machine is more advanced in technique，compact structure，it is suitable for normal temperature filling and hot filling .The machine can be used to fill beverage(Mineral water，purified water，distilled water，fruit juice，tea and so on). as well as washing，filling and sealing other liquid，such as vinegar. It is one of the most advanced filling machines at present.

技术参数 Technical Parameter

型号 Model	CGFR16126	CGFR18186	CGFR24248	CGFR323210	CGFR404012	CGFR505012	CGFR606015	CGFR808020
冲洗，灌装，旋盖头数 Heads of washing,filling,sealing	16-12-6	18-18-6	24-24-8	32-32-10	40-40-12	50-50-12	60-60-15	80-80-20
生产能力 Production capacity:500ml(B/H)	4000	6000	10000	12000	16000	22000	26000	36000
适用瓶型规格 Suitable bottle size	Φ=50-Φ95mm 330-1500ml		Φ=50-105mm 330-2250ml		Φ=50-110mm 330-2500ml			
喷冲压力 Spraying pressure(Mpa)	0.25-0.3							
灌装温度 Filling temperature（℃）	80-95							
功率 Power supply(KW)	5	5.8	6.3	9.6	11.5	14	19	24
外形尺寸 Overall dimension(L×W×H)mm	2300×1700 ×2500	2500×1850 ×2500	3100×2100 ×2500	4600×2160 ×2500	4600×3800 ×2500	5000×4700 ×2500	6500×5400 ×2500	7700×6400 ×2500
重量 Weight(kg)	2600	3500	5000	6800	8500	10000	12500	16000








张家港圣诺飞机械有限公司
Zhangjiagang SANOFI Machinery Co., Ltd

热灌装线的前处理设备
Pre-treatment Equipment for Hot Filling Line



冷热缸
Heating and Cooling Tank

适用于在低温或高温状态下搅拌液体，也可用于加热，冷却，保温，消毒和储备饮料。
产量：0.6T—5T。

Applicable to churn up liquid material at the state of low or high temperature,for heating, cooling，keep warm，sterilize and reserve beverage．Capacity：0.6T-5T.



真空脱气机
Vacuum Degasser

用于果汁等饮料的脱氧，延长饮料保质期。
产量：1T／H—10T／H

Used for juice deoxygenate under the vacuum state to extend storage term of beverage．
Capacity：1T／H-10T／H



高压均质机
Homogenizer

整个机器用不锈钢制成的外壳罩住所有仪表，钮均固定在外罩上，外表光洁，精致美观，适用于现代工业生产，在乳品，食品，制药等行业中得到广泛应用。
The whole machine is covered by shell which is made of stainless steel.All buttons are fixed on the shell.The appearance is bright and fine.It is used in the modern industry production,as milk industry,pharmacy industry and so on.



超高温瞬时灭菌机
Ultra high-temperature sterilizer (UHT)

该设备主要用于鲜牛奶，果汁，茶饮料，酒精，豆浆等的杀菌。
产量：1T／H—10T／H

This equipment is mainly used for sterilization for fluid material．such as fresh milk，juice，tea，alcohol，soybean milk and so on.
Capacity：1T／H-10T／H



板UHT杀菌器
Plate UHT Sterilizer

主要用于加热消毒果汁，茶饮料，鲜牛奶，和酒精其他热敏感的液体，可以保温，冷却，灭菌温度85—135℃。
产量：3T／H-15T／H

Mainly used for heating and sterilizing juice, tea beverage，fresh milk，and alcohol and other heat sensitivity liquid，also keeping warm and cooling,with the sterilization temperature at 85-135℃.
Capacity：3T／H-15T／H




管UHT杀菌器
Pipe UHT Sterilizer

此灭菌器主要用于消毒高粘度的产品，纤维和果肉，高酸度产品，如果汁，果酱，咖啡饮料，灭菌奶。杀菌温度在80℃—140℃。
产量：3T／H-15T／H

This sterilizer is mainly used for sterilization in high viscosity products with fiber and bigger flesh，and other products with high acidity，such as fruit juice，jam，coffee beverage，sterilized milk．Sterilization temperature iS at 80℃-140℃.
Capacity：3T／H-15T／H

热灌装线的后处理设备
Post-treatment Equipment for Hot Filling Line

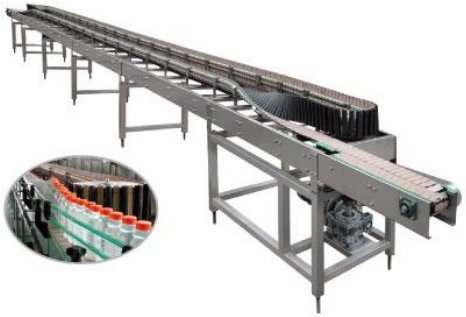

倒瓶杀菌器 Bottle overturn sterilizer

用于瓶口，瓶盖内部灭菌。
Used for sterilizing at bottle mouth and inside of bottle caps.

技术参数 Technical Parameter

产量	Capacity(b/h)：3000-18000
杀菌时间	Sterilizing time(s)：15—20s
输送速度	Belt speed：4—20m／min
电机功率	Motor power：2.2kw

喷淋冷却机 Spraying And Cooling Machine

利用循环水喷淋冷却成品。喷淋的时间和温度可调。
Make use of recycled water to spray and cool finished goods．Time and temperature of spraying is adjustable.



技术参数 Technical Parameter

型号	Model	PLJ-4000	PLJ-6000	PLJ-12000	PLJ-36000
生产能力	Production capacity(b/h)	3000—5000	6000—9000	10000—15000	24000—36000
出口温度	Out bottle temperature(℃)	37~45	37~45	37~45	37~45
冷却时间	Cooling time(min)	20-30min	20-30min	20-30min	20-30min
网带宽度	Width of chain(mm)	1220	1200	2000	2000
蒸汽压力	Steam pressure(Mpa)	<0.4	<0．4	<0．4	<0．4
耗水量	Water consumption(m3/h)	6	9	15	28
蒸汽用量	Steam consumption(kg/h)	80	120	250	280
电机功率	Motor power(kw)	2.2	3	5	9
外形尺寸	Dimension(mm)	6000x1500×1700	8000x1500x1700	12000x2200×1700	22000x2200×1700
重量	Weight(kg)	2000	3000	4000	6000



张家港圣诺飞机械有限公司
Zhangjiagang SANOFI Machinery Co., Ltd

QGF 型自动桶装生产线
QGF Water Treatment Line


QGF-100



QGF-300


拔盖
Pull lids


灌装
Fill


上桶
Put on bottles


内外刷
Inside&outside brush

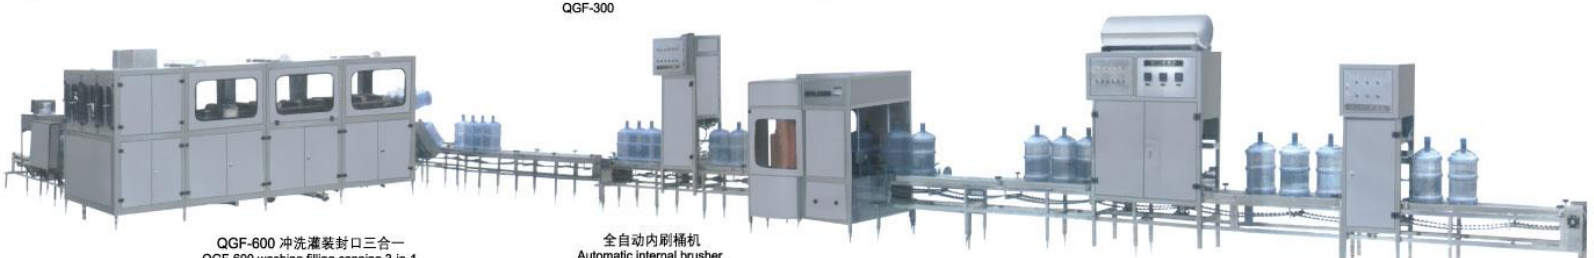
QGF-600 冲洗灌装封口三合一
QGF-600 washing filling capping 3-in-1

全自动内刷桶机
Automatic internal brusher

全自动外刷桶机
Automatic external brusher

检漏机
Leak tester

全自动拔盖机
Automatic de-capper

该生产线是专供3-5加仑桶装饮用水生产之用，型号有100型、150型、200型、300型、450型、600型、900型、1200型。该系列桶装生产线由洗瓶、灌装、封口三部分组成。洗瓶机采用多道洗涤液喷射和消毒液喷射，达到洗涤、消毒的目的，消毒液可以循环使用。封口机可以自动封口，输送瓶盖过程口配有位淋装置，以确保瓶盖无菌清洁。该系列生产线均可自动洗涤、消毒、灌装、压盖、计数和输出。具有功能齐全、设计新颖、自动化程度高等特点，是集机、电、气一体的新型饮用水桶装设备。

This filling specially produces 3-5 gallons barreled drinking water. Production capacity 100-1200(barrels/hour). It integrates bottle washer, filler and sealer into one unit. In order to achieve the purpose of multiple injections of washing and sterilizing by means of liquid, washing and bleaching are used in bottle washer. Washing solution can be used circularly. The sealer can seal barrel caps automatically. This line equips with water spraying device to sterilize caps of bottles to ensure caps are aseptic and healthy Also this line can automatically feeding, washing, sterilizing, filling, capping, counting and products discharging, It is a new kind of barreled water auto-production line, which integrates mechanism, electricity and pneumatics technology together.



拔盖刷桶机 Lid Pulling and Barrel Brushing Machine
适用于5加仑、3加仑回收塑桶的拔盖预刷洗。
Suitable for pulling lid and pre-brushing 5 gallon and 3 gallon returnable plastic barrels.

处理能力Treatment Capacity(kg/h)	200-300s/h
功率Power(kw)	1.1
外形尺寸Overll Dimension(mm)	800x800x1200
重量Weight(kg)	110

型号Model	QGF-100	QGF-200	QGF-300	QGF-450	QGF-600	QGF-900	QGF-1200
灌装头数Filling Heads	1	2	2.3	3	5	8	8
灌装容量Volume(L)	18.9	18.9	18.9	18.9	18.9	18.9	18.9
桶形规格Barrel Size(mm)	Φ270x490	Φ270x490	Φ270x490	Φ270x490	Φ270x490	Φ270x490	Φ270x490
生产能力Capacity(b / h)	100	200	300	450	600	900	1200
气源压力Gas PressureforAirSource(Mpa)	0.4-0.6	0.4-0.6	0.4-0.6	0.4-0.6	0.6	0.6	0.6
耗气量Gas Consumption(m3 / min)	0.37	0.37	0.6	0.8	1	1.5	1.8
电机功率Motor Power(kw)	1.38	175	3.8	3.8	7.5	9.75	13.5
额定电压Rated Voltage(V)	380V/50HZ	380V/50HZ	380V/50HZ	380V/50HZ	380V/50HZ	380V/50HZ	380V/50HZ
重量Weight(kg)	680	800	1500	2100	3000	3500	4500



张家港圣诺飞机械有限公司
Zhangjiagang SANOFI Machinery Co., Ltd

酒类灌装 Liquor Filling

冲洗，灌装，封盖一体。
本机是用于灌装白酒，葡萄酒，伏特加酒
Combine rinsing，filling and capping in monoblock．this machine is use for distilled spirit，wine，Vodka filling.



技术特点 Technical Features

灌装阀采用高精密机械灌装阀，具有无瓶不抽真空的特点。开式齿轮接结合齿轮箱传动，带有离合装置，变频调速设备扩展了机器的速度调节范围。本机具有自润滑装置，润滑点可以定期加油润滑。该机效率高，噪音低，寿命长。酒缸封盖头可以手动调节，从而适应不同大小的瓶子。灌装缸的液位高度采用传感器控制，从而确保液位精度。

Filling valve adopts high precision mechanical filling valve，with the character of no bottle no vacuum pumpmg.
Open Gear combinated gear box transmission，with on-off device．Frequency conversion velocity modulation device extends the speed modulating scope.
This machine has self oil lubrication device so that the lubrication points could be lubricated regularly in time.
The machine is of high efficiency，low noise and long life.
Wine jar and capping head are driven by hand to fit different sizes of bottles.
The material height in the tank is controlled by electric probe to assure the precise liquid level.







技术参数 Technical Parameter

型号 Model	清洗头 Washing heads	灌装头数 Filling heads	旋盖头 Capping heads	生产能力 Production Capacity(b/h)	主电机功率 Power of main motor (kw)
CGFJ18-18-6	18	18	6	5000	2.2
CGFJ24-24-8	24	24	8	8000	3
CGFJ32-32-10	32	32	10	10000	5.5

易拉罐灌装机 Pop-top Can Filling Machine



此灌装机用于铝易拉罐，马口铁罐和塑料罐的灌装封盖，可分为热灌装碳酸饮料灌装。它具有许多优，封盖质量好，运行稳定，优雅外观，易于操作和维护，生产速度可调。我们可以根据客户要求配置控制系，这是啤酒及饮料厂最好的选择。

This filling machine is used for aluminum pop cans，tin cans and plastic cans filling andcapping，which divides into hot filling and carbonated filling. It has many advantages like good-sealing quality，stable operation，elegant appearance，easy to operate andmaintain and speed regulation of produce—speed. We could configure the control system as client's needs，so it is the best choice for brewers and beverage factories.









技术参数 Technical Parameter

型号Model	能力Capacity	功率 Power (kw)	重量 Weight (kg)	尺寸 Size (mm)
FG18-4	100~120cans/min (335ml)	5.5	3500	3200×2200×2800
FG32-6	280~300cans/min (335ml)	6.5	4200	3900×2500×3000





二氧化碳过滤器
CO_2 Filter

Used for purifying carbon dioxide，with reasonable structure and reliable safty.

主要用于碳酸饮料的气液糖的混合加工。

该机采用先进的气液混合装置，可将糖浆及添加剂、水、二氧化碳气体三者一次混合，供灌装机使用。也可用于稀释啤酒、啤酒充气以及汽酒等的生产。它具有工艺先进、混合充分、糖与水混合精度高、含气量高、结构紧凑、使用方便、适用于大、中、小型饮料厂使用。

Mainly applicable for mixing water-syrup-CO_2 proportionally in beverage industry.
There is a set of advanced water-gas mixing device on the machine.This machine could proportionally mix syrup,additive,drink water and CO_2 into finished beverage before bottling.It also could thin beer or aerate beer or produce sparkling wine before bottling .This machine has features of most advanced process technology,well mixing effectiveness,high syrup-water mixing precision,high CO_2 content in finished beverage,more compact structure and convenient operation.

技术参数 Technical Parameter

型号 Modle	QHS-1500	QHS-2500	QHS-3500	QHS-5000	QHS-8000
生产能力 Capacity(L/hr.)	1000-1500	2000-3000	3000-4000	4000-6000	8000-9000
含气量(GV) Gas content in beverage	1.5-2.5	1.5-2.5	>2.5	>3.5	>3.5
糖浆与水调节比例范围 Mixing range(Syrup-water)	1：3-1：6			1：3-1：6	
冷冻水入口温度 Temperature in chilled water	0-5℃			0-4℃	
饮料脱氧方式 Water dexidization method	用CO_2气体置换水中的氧气 Deoxidized by CO_2			真空脱氧 Deoxidized by vacuum system	
预碳化罐 糖浆罐工作压力 Working pressure of pre-carbination tank and syrup tank(Mpa)	0.05-0.08			预碳化罐（脱气罐） Pre-carbination tank：-0.08~-0.06	
储存罐工作压力 Working pressure in storage tank(Mpa)	0.2-0.5			0.2-0.5	
功率 Power supply(kw)	1.1	4	4.5	5.2	8.5
外形尺寸 Overall dimension(mm)	900×700×2000	1500×1100×2100	1800×1200×2100	3000×1800×2200	3500×2100×2500
重量 Weight(kg)	500	1000	1200	1800	2800

PET瓶生产系统 PET Bottle Making System

它包含了完整的全自动吹瓶机，高，低压空气压缩机，过滤器，干燥机，模具等系统，分为全自动和半自动，用于各种塑料饮料瓶的生产。

It contains full automatic bottle blowing machine，high and low pressure air compressor，filter，dryer，moulds and so on．This system is，divided into full automatic and semi-automatic，is used for making different kinds of plostic beverage bottles.

全自动吹瓶机 Full automatic bottle blowing machine

全自动吹瓶机产量：1600~20000瓶/小时

Capacity of full automatic bottle blowing machine：1600BPH to 20000BPH



全自动吹瓶机
Automatic Stretch blow Molding Machine



高压
空气压缩机
High pressure
air compressor



低压
空气压缩机
Low pressure
air compressor



储气罐，空气干燥器，空气过滤器
Air tank，Air dryer，air filter



冷水机
Water chiller

技术参数 Technical Parameter

Automatic Linear 全自动直线吹瓶机	A Series A系列	A-2	2,000BPH	0.05L-2L
		A-3	3,000BPH	
		A-4	4,000BPH	
		A-6	6,000BPH	
		A-8	8,000BPH	
		A-2L	1,200BPH	5 gallon

半自动吹瓶机 Semi—automatic bottle blowing machine

半自动吹瓶机产量：1500~2800瓶/小时

Capacity of semi-automatic bottle blowing machine：1500BPH to 2800BPH



半自动吹瓶机
Bottle blowing machine



高压空气压缩机
High pressure air Compressor



瓶模具
Bottle mould



空气过滤器
Air filter

技术参数 Technical Parameter

Semi-automatic 半自动吹瓶机系列	B Series	B-1	800BPH	0.05L-2L
		B-3	1,800BPH	
		B-4	2,400BPH	
	C Series Y Series	C-2	600BPH	0.1L-6L 5 gallon
		Y	90BPH	

套标机 Sleeve Labeing Machine

此套标机用于饮料生产线上对瓶子进行套标和缩标。

产量：6000-36000BPH.

Sleeve labeling machine is used for labeling and shrinking with shrink oven.

Capacity：6000 to 36000BPH.



贴标机 Labeling Machine

本机适用于贴玻璃瓶，塑料瓶和金属罐的纸标签。

贴标速度：30pcs／min-200pcs／min

This machine is suitable for glass bottles，plastic bottles and metal can of paper labeling.

Labeling speed：30pcs／min-200pcs／min



自粘不干胶贴纸标签机 Self-adhesive Stick Labeling Machine

贴标速度：高达200pcs／min

Labeling speed：up to 200pcs／min



SF-300 半自动热收缩包装机

SF-300 Semi-automatic Shrink Sleeve Wrapping Machine









全自动热收缩包装机 Automatic Shrink Packaging Machine

适用范围：

适用于啤酒、饮料、果汁、牛奶、食品、医药等行业。

包装物为易拉罐、玻璃瓶、PET瓶等

Range of Application :

Suitable for beer, beverage, juice, milk, food, pharmaceutical and other industries.

Packaging products are cans, glass bottles, PET bottles









理瓶机 Bottle Unscrambler

此设备适用于高产量的生产线。把杂乱的瓶子成规则的排列，并传递到下一个工艺。
This equipment is used along with production line with high capacity.
It sorts rambling bottles into line type and conveys to next craft.



技术参数 Technical Parameter

型号 Model	能力 Capacity(B/H)	功率 Power (kw)	重量 Weight (kg)	尺寸 Size (mm)
LP-14	6000-8000	1.5	3200	Φ2200×2340
LP-18	15000-18000	3	4200	Φ2640×2340
LP-21	18000-22000	3	4600	Φ3020×2650
LP-24	22000-26000	4	5000	Φ3400×2650

输送系统 Conveying system



风力输送 Air Conveyor



链条输送 Chain Conveyor

上盖机
Cap Loader Machine





皮带上盖机
Cap Loader Machine by Belt

风力上盖机
Cap loader Machine by Blowing Air



























